
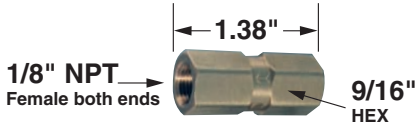
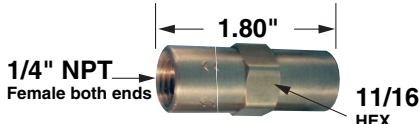


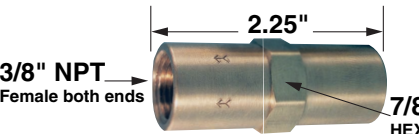

# Check Valves

- Ideal for horizontal and vertical machining centers
- Stops drain-down of coolant lines between tool changes
- Eliminates delay of coolant flow, preventing dry cutting

DIMENSIONS IN INCHES

Part No.	Configuration	Pkg Qty
CV19005	 <p>1.38" 1/8" NPT Female both ends 9/16" HEX</p>	1
CV19010	 <p>1.80" 1/4" NPT Female both ends 11/16" HEX</p>	1
CV19015	 <p>2.25" 3/8" NPT Female both ends 7/8" HEX</p>	1



**QPM Check Valves** dramatically speed up coolant response time in this machining center application.

**Material:** Brass    **Cracking Pressure:** 1 psi (.07 bar)  
**Maximum Pressure:** 500 psi (33 bar)  
**Maximum Operating Temperature:** 160°F  
Recommended Coolant Filtration: 100 microns

**NOTE:** Use *DualFit* nipples to adapt to BSPT ports